

Double Direction Closed LED U-Light

LOT-LL-40-26/LOT-LL-60-26




Double Direction Closed LED U-Light

LOT-LL-40-26/LOT-LL-60-26

Product Number	LOT-LL-40-26/LOT-LL-60-26
Lumen Output	4,200 - 6,300
Wattage	40W - 60W
Lumen Efficacy	105lm/w
CCT	3000K - 4000K - 5000K
Dimensions	49 2/8" x 11" x 2 6/8"
Input Voltage	UNV = Universal 120-277 VAC HV = 347 VAC & 480 VAC
IP Rating	No Rating
LED Driver	Class II driver, with 0-10V or triac dimming
Certification	UL, DLC, FCC, ISO

Product Description

The Double Direction Closed LED U-Light is a fantastic lighting option for commercial properties, public buildings, offices, hotels, and restaurant locations. When suspended, light is cast both upwards and downwards. This sleek fixture provides an instant-on, even wash of light with a wide angle and glare reduction. Treated with a 5-stage bonding process, this fixture is finished with a baked enamel yielding high reflection. The high quality LED chips maintain efficiency, heat dissipation, stability, and lumen output. The product contains a built-in surge protector and class II driver with 0-10V or Triac dimming and a lifetime of 50,000 hours. Optional features such as dimming options and interchangeable color options are also available.

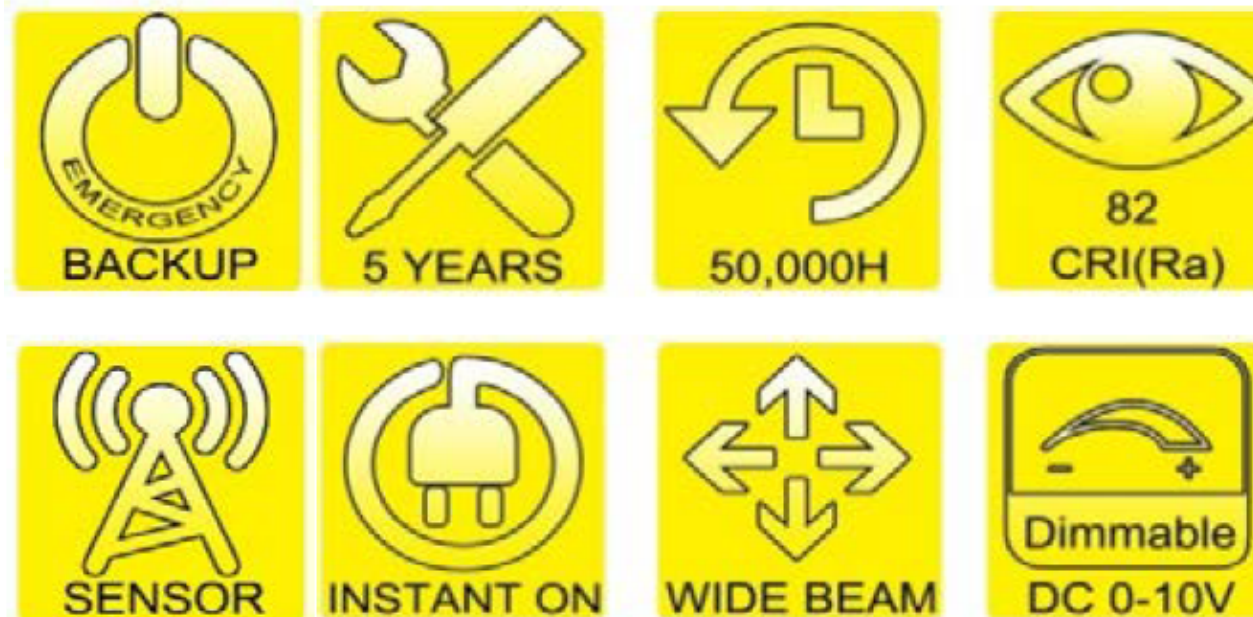

www.Lightingoftomorrow.com
1-800-538-4446